



AIRDUC® PVC 341

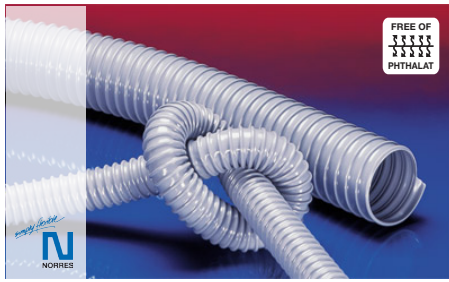

PVC hose, medium-heavy

Applications

- flexible hose/ ducting for gases and for dust, powder, fibres
- extraction unit, dedusting system, filter system, oil mist extraction
- galvanic extraction
- chemical industry: chemical vapours, vapour return hose at loading arm, paint steam, spray mist extraction
- heating hose: exterior hose as protection hose

- medium-heavy duty
- good resistance to alkalis and acids
- good resistance to chemicals
- phthalate-free
- flame-retardant according to: UL94-HB
- conforms to RoHS guideline

Temperature Range

- 20°C to 70°C
- short time to 80°C

Properties

Design, Material

AIRDUC® profile hose

- spring steel wire firmly embedded in wall
- wall: high grade soft PVC
- wall thickness 0,9 mm approx.

Delivery variants

- further diameters and lengths available on request
- grey (standard)
- special colours: transparent, full coloured
- customer-specific branding

I.D. in / mm	O.D. mm	Over- pressure bar	Under- pressure bar	Bending Radius mm	Weight kg/m	Dimensions in Stock m	Order No.
- / 20	27	1,385	0,500	17	0,190	10 15	341-0020-0000
1 / 25	32	1,125	0,400	20	0,230	10 15	341-0025-0000
- / 30	38	0,945	0,275	23	0,250	10 15	341-0030-0000
1,25 / 32	40	0,890	0,260	24	0,270	10 15	341-0032-0000
1,36 / 35	43	0,815	0,235	26	0,300	10 15	341-0035-0000
1,5 / 38	46	0,755	0,220	27	0,320	10 15	341-0038-0000
- / 40	48	0,715	0,205	28	0,330	10 15	341-0040-0000
- / 42	50	0,675	0,200	29	0,350	10 15	341-0042-0000
1,75 / 44-45	53	0,640	0,185	31	0,370	10 15	341-0045-0000
2 / 50-51	58	0,575	0,165	33	0,410	10 15	341-0050-0000
- / 55	63	0,525	0,150	36	0,450	10 15	341-0055-0000
2,36 / 60	68	0,485	0,140	38	0,490	10 15	341-0060-0000
2,5 / 63-65	73	0,445	0,125	41	0,520	10 15	341-0065-0000
- / 70	79	0,415	0,120	44	0,540	10 15	341-0070-0000
3 / 75-76	84	0,390	0,110	47	0,580	10 15	341-0075-0000
- / 80	89	0,365	0,105	49	0,610	10 15	341-0080-0000
3,5 / 89-90	99	0,325	0,090	54	0,700	10 15	341-0090-0000
4 / 100-102	109	0,295	0,060	59	0,850	10 15 20	341-0100-0000
- / 105	114	0,280	0,060	62	0,890	10 15	341-0105-0000
- / 110	119	0,265	0,055	64	0,940	10 15	341-0110-0000
4,5 / 114-115	124	0,255	0,050	67	0,980	10 15	341-0115-0000
4,72 / 120	129	0,245	0,050	69	1,020	10 15	341-0120-0000
5 / 125-127	134	0,235	0,045	72	1,060	10 15	341-0125-0000
- / 130	139	0,225	0,045	74	1,100	10 15	341-0130-0000
5,5 / 140	149	0,210	0,040	79	1,180	10 15	341-0140-0000
6 / 150-152	159	0,195	0,040	84	1,260	10 15	341-0150-0000
6,3 / 160	169	0,185	0,035	89	1,350	10 15	341-0160-0000
7 / 178-180	189	0,165	0,030	99	1,510	10 15	341-0180-0000
8 / 200-203	209	0,145	0,030	109	1,670	10 15	341-0200-0000
- / 225	234	0,130	0,025	122	2,260	10	341-0225-0000

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. Additional technical data at www.norres.com. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data.

I.D. in / mm	O.D. mm	Over- pressure bar	Under- pressure bar	Bending Radius mm	Weight kg/m	Dimensions in Stock m	Order No.
- / 250	259	0,120	0,020	134	2,510	10	341-0250-0000
11 / 280	289	0,105	0,020	149	2,800	10	341-0280-0000
- / 300	309	0,100	0,020	159	3,000	10	341-0300-0000
- / 350	359	0,100	0,015	184	3,500	10	341-0350-0000

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data. Additional technical data at www.norres.com/en/technology/

Accessories



CLAMP 212




CLAMP 212 EC




CLAMP 217




CLAMP 213



CONNECT 228




CONNECT 240 + 241




CONNECT 242



CONNECT 243



CONNECT 244



CONNECT 245



CONNECT 246



CONNECT 223



CONNECT 270-271

Overpressure and underpressure are recommended threshold operating values, products can be subjected to higher loads upon request. The bending radius is measured through the inside of the hose arch. Additional technical data at www.norres.com. The right to make technical modifications is reserved. All values determined at 20°C and are approx. data.