


7914 - 3/2 WITH VENT, MALE PARALLEL & PUSH-IN CONNECTION

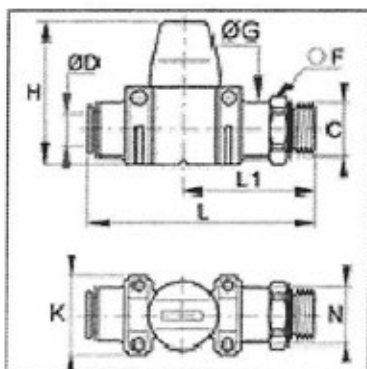

Opening/closing.
Compact and light weight, suitable for all types of installations thanks to the 3 types of mounting available.

Poster - Pneumatic function fittings

maximum working pressure	10 bar 1 MPa 145 psi
working temperature	-20 to 80 °C -4 to 176 °F 253 to 353 °K
body	TECHNICAL POLYMER
sub-base	NICKEL PLATED BRASS
stem	BRASS
stem seal	NBR
'O'-rings	NBR
handle	TECHNICAL POLYMER
gripping ring	STAINLESS STEEL

Part No	ØD (MM)	C	F (mm)	ØG (mm)	H (mm)	K (mm)	L (mm)	L1 (mm)	N (mm)
LE-7914 06 10	6	G1/8	13	14	37	22	62	37	16
LE-7914 08 13	8	G1/4	16	17.5	37	22	61	35	16
LE-7914 10 17	10	G3/8	20	22	43	30	74	41	22
LE-7914 12 21	12	G1/2	24	26	43	30	75	42	22