


0482 - 3 WAY BALL VALVE FEMALE RIGHT ANGLED PORTING

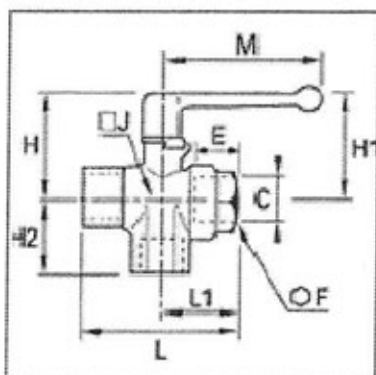

Panel-mountable 3-way ball valve.

- full flow
- optimum sealing due to compensating "O" rings
- excellent resistance to scaling due to ball seal configuration

maximum working pressure	20 bar 2 MPa 290 psi
working temperature	-20 to 80 °C -4 to 176 °F 253 to 353 °K
body	NICKEL PLATED BRASS
retaining nut	NICKEL PLATED BRASS
stem	BRASS
stem seal	NBR
'O'-rings	NBR
ball seal	NBR
handle	ZAMAK

Part No	C	E (mm)	F (mm)	H (mm)	H1 (mm)	H2 (mm)	J (mm)	L (mm)	L1 (mm)	M (mm)
LE-0482 06 13	G1/4	12	19	38	31	24	22	53	28	48
LE-0482 09 17	G3/8	12	24	45	43	27	25	59	31	69
LE-0482 12 21	G1/2	15	27	47	44	33	29	67	34	69
LE-0482 23 34	G3/4	16.5	38	59	51	40	39	80	39	108