



High-Duty

Superior oil resistance

- Manufactured from a blend of natural SBR rubber and nitrile.
- Standard edged all round mats or interlocking modular sections.
- Provides both slip-resistance and fatigue-relief.
- Raised circular surface gives excellent underfoot grip.
- Conforms to Slip Resistance Test EN13552 Category R10.
- Spilt liquids drain through open drainage holes.
- A comfortable alternative to cold hard floors.

Product height: 12.5mm

Dimensions (m.)	Weight Kg	Packaging Dimensions (cm.)	Packaging Type	Packaging Volume (m.)	Packaging Quantity	Colour	Part Code
0.9 x 1.5	11	17.5 x 17.5 x 105	Boxed	1	25	Black	HI010001
0.9 x 1.5 edged 2 long 1 short side	10	17.5 x 17.5 x 105	Boxed	1	25	Black	HI010002
0.9 x 1.5 edged 2 long sides	11	17.5 x 17.5 x 105	Boxed	1	25	Black	HI010003
0.9 x 1.5 edged 2 short 1 long	12	17.5 x 17.5 x 105	Boxed	1	25	Black	HI010004
0.9 x 1.5 edged 2 short sides	11	17.5 x 17.5 x 105	Boxed	1	25	Black	HI010005

Material: Natural Rubber/25% nitrile compound
 Surface Finish: Circular pattern construction for extra grip and holes to allow drainage.
 Product Height: 12.5mm

Operating Temperature: -10° - + 65°C
 Resistance to Chemicals: Natural rubber/nitrile blend offers an increased resistance to mineral oils, aggressive machine coolants and animal fats and oils.

Environmental Resistance: Used in wet and dry areas
 UV Resistance: N/A

Typical Applications: Ideal for most wet and dry industrial environments, offering excellent slip resistance in the wet. Suitable for behind bars and other catering applications.

Installation Method: Loose lay connectable tiles. Five configurations:-
 Edged all round
 Edged two long & one short side
 Edged two long sides
 Edged two short & one long side
 Edged two short sides

Continued on next page

The information contained within this datasheet is for guidance only. The data and suggested application are not exhaustive. All dimensions quoted are nominal figures. Please note that some products may be subject to a degree of shrinkage when installed into some applications.

Cleaning Method: Pressure wash with mild detergent or pass through commercial dishwasher.

Product Performance: Conforms to Slip Resistance test EN13552 Category R10

Fatigue:



Slip Resistance:



Wear:



Low ≠ High




Country of Origin:

Sri Lanka

Other:

Silicone is used in the production process of the mats and a residue will possibly be left on the product.

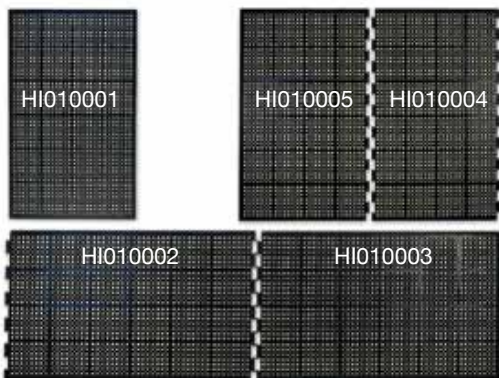

End of document

The information contained within this datasheet is for guidance only. The data and suggested application are not exhaustive. All dimensions quoted are nominal figures. Please note that some products may be subject to a degree of shrinkage when installed into some applications.