

# Smooth Bore PU Ducting



## Colour:


Clear with grey spiral

## Construction:

- Ester based PU
- Shock resistant PVC spiral, crushing, chemical agents, abrasion and weather resistant, corrugated outside
- Smooth bore for optimal flow

## Applications:

Suction and transportation of abrasive media such as powders, pellets, granulates, fibres, industrial ventilation and airflow systems. Also dust, gases, liquids and powders.

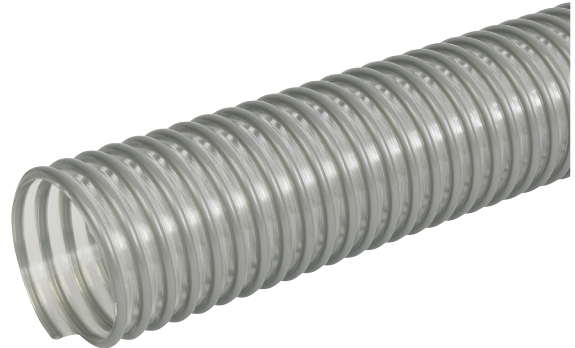

Food grade according to (EU) No 10/2011

**Temperature:** Suitable for use in the range -20 to + 80 ° C



**Working Temperature:**

-20°C to +80°C



Part Code	ID mm	Soft PU wall thickness mm	Vacuumm/H <sup>2</sup> O	Bend Radius mm	Weight g/m
PUSB-25	25	0.6	6.0	65	300
PUSB-38	38	0.9	6.0	78	470
PUSB-51	51	0.9	6.0	100	615
PUSB-76	76	0.9	4.0	145	920
PUSB-102	102	1.1	3.0	200	1250
PUSB-127	127	1.1	2.5	250	1560
PUSB-152	152	1.1	2.0	305	1850
PUSB-203	203	1.1	1.5	410	2500