

Blow Guns




Standard Nozzles

The zinc slotted nozzle allows powerful, quiet and efficient cleaning. Suitable for general purpose use.

SIL-2055-A

SIL-2055-A: with a zinc slot nozzle that efficiently utilizes the surrounding air. Provides powerful, quiet and efficient cleaning. For general-purpose blowing in environments where the nozzle is exposed to minimal mechanical wear. Blowing force 3.0 N (10.6 oz).

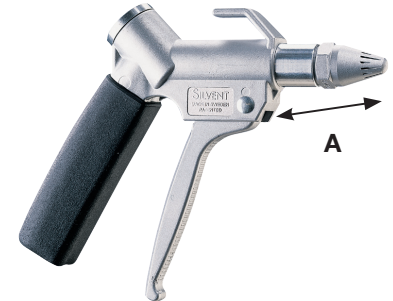

Noise reduction

65%

Air/cost savings

22%

SPECIFICATIONS

	SI units	US units
Blowing force	13.5 N	3.0 lbs
Air consumption	92 Nm ³ /h	54.1 scfm
Sound level	93 dB(A)	
Blowing pattern	Wide	
Connection	G 3/8 "	3/8"-18 NPT
Connection type	Female	
Material	Aluminum	
Weight	0.240 kg	0.529 lbs
Max temp	70 °C	158 °F
Min. operating pressure	0.2 MPa	28.6 psi
Max operating pressure	1.0 MPa	143.0 psi

Benefits

Replace open pipe	8 mm	5/16 inch
Noise reduction [dB(A)]	15 dB(A)	65 %
Air/cost savings [Nm ³ /h]	26 Nm ³ /h	22 scfm
OSHA	Yes	
Meet the EU Machine directives	Yes	

Blowing properties at different pressures

SI units (kPa)	200	400	600	800	1000
Blowing force (N)	5.8	10.8	16.0	21.1	26.2
Air consumption (Nm ³ /h)	45.3	76.2	107.1	138.0	168.9
Sound level (dB(A))	82.6	89.4	93.8	97.3	99.0
US units (psi)	40	60	80	100	120
Blowing force (oz)	27.6	40.2	52.8	65.5	78.1
Air consumption (scfm)	33.9	46.7	59.4	72.1	84.8
Sound level (dB(A))	86.0	90.2	93.2	95.5	97.4