


TUBING POLYURETHANE COIL HOSES

Ordering Code

| | | | | | | | | | | | |
|------------------------------|---|---|----------|---|----------------|---|---------------|---|--------------|---|---|
| P | U | C | — | 4 | / | 1 | — | * | | | |
| Model | | | O.D. | | Working Length | | Colour | | | | |
| Polyurethane Hose | | | 04 : 4mm | | 1 : 1m | | B : Blue | | | | |
| | | | 06 : 6mm | | 2 : 2m | | Blank : Black | | | | |
| | | | 08 : 8mm | | | | | | | | |
| P | U | C | — | 4 | / | 1 | — | * | — | 1 | 8 |
| Model | | | O.D. | | Working Length | | Colour | | Thread, BSPT | | |
| Polyurethane Hose Assemblies | | | 04 : 4mm | | 1 : 1m | | Blank : Black | | 18 : 1/8" | | |
| | | | 06 : 6mm | | 2 : 2m | | | | 14 : 1/4" | | |
| | | | 08 : 8mm | | | | | | | | |

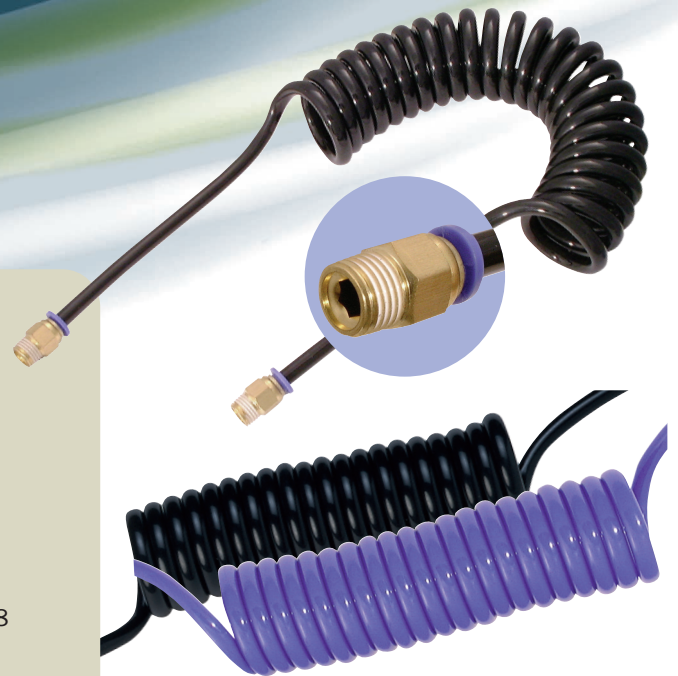

Product Features

Polyurethane self-storing hose was developed to eliminate the two most common limitations of nylon self-storing hoses: kinking and abrasion.

Polyurethane Coil Hose is ideal for use in tough work areas or highly mobile applications and is well suited for production line air tools, instrumentation, robotics, and many more industrial applications.

1. Excellent return and coil memory
2. Heat and light stable
3. Light and flexible making it easy to install / use in confined spaces

Technical Data

| Tube O.D. (mm) | Working Pressure @ 23°C (bar) |
|----------------|-------------------------------|
| 4 | 12 |
| 6 | 11 |
| 8 | 12 |

Working Pressure

3 to 1 safety factor


Temperature

-20°C to +70°C

TUBING POLYURETHANE COIL HOSES

Dimensions Coil Hose

| Model | OD (mm) | ID (mm) | Colour | Working Length Metre | A (mm) | B (mm) | C (mm) |
|---------|---------|---------|--------|----------------------|--------|--------|--------|
| PUC4/1 | 4 | 2.5 | Black | 1 | 80 | 26 | 60 |
| PUC4/1B | 4 | 2.5 | Blue | 1 | 80 | 26 | 60 |
| PUC4/2 | 4 | 2.5 | Black | 2 | 80 | 26 | 120 |
| PUC4/2B | 4 | 2.5 | Blue | 2 | 80 | 26 | 120 |
| PUC6/1 | 6 | 4 | Black | 1 | 120 | 37 | 51 |
| PUC6/1B | 6 | 4 | Blue | 1 | 120 | 37 | 51 |
| PUC6/2 | 6 | 4 | Black | 2 | 120 | 37 | 120 |
| PUC6/2B | 6 | 4 | Blue | 2 | 120 | 37 | 120 |
| PUC6/3 | 6 | 4 | Black | 3 | 120 | 37 | 185 |
| PUC6/3B | 6 | 4 | Blue | 3 | 120 | 37 | 185 |
| PUC8/2 | 8 | 5 | Black | 2 | 150 | 47 | 140 |
| PUC8/2B | 8 | 5 | Blue | 2 | 150 | 47 | 140 |
| PUC8/3 | 8 | 5 | Black | 3 | 150 | 47 | 210 |
| PUC8/3B | 8 | 5 | Blue | 3 | 150 | 47 | 210 |
| PUC8/5 | 8 | 5 | Black | 5 | 150 | 47 | 345 |
| PUC8/5B | 8 | 5 | Blue | 5 | 150 | 47 | 345 |

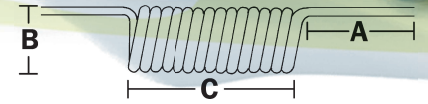

Coil Hose Assemblies

| Model | OD (mm) | ID (mm) | Colour | Male Thread, BSPT | Working Length Metre | A (mm) | B (mm) | C (mm) |
|-----------|---------|---------|--------|-------------------|----------------------|--------|--------|--------|
| PUC4/1-18 | 4 | 2.5 | Black | 1/8" | 1 | 80 | 26 | 60 |
| PUC4/1-14 | 4 | 2.5 | Black | 1/4" | 1 | 80 | 26 | 60 |
| PUC4/2-18 | 4 | 2.5 | Black | 1/8" | 2 | 80 | 26 | 120 |
| PUC4/2-14 | 4 | 2.5 | Black | 1/4" | 2 | 80 | 26 | 120 |
| PUC6/1-18 | 6 | 4 | Black | 1/8" | 1 | 120 | 37 | 51 |
| PUC6/1-14 | 6 | 4 | Black | 1/4" | 1 | 120 | 37 | 51 |
| PUC6/2-18 | 6 | 4 | Black | 1/8" | 2 | 120 | 37 | 120 |
| PUC6/2-14 | 6 | 4 | Black | 1/4" | 2 | 120 | 37 | 120 |
| PUC6/3-18 | 6 | 4 | Black | 1/8" | 3 | 120 | 37 | 185 |
| PUC6/3-14 | 6 | 4 | Black | 1/4" | 3 | 120 | 37 | 185 |
| PUC8/2-14 | 8 | 5 | Black | 1/4" | 2 | 150 | 47 | 140 |
| PUC8/2-38 | 8 | 5 | Black | 3/8" | 2 | 150 | 47 | 140 |
| PUC8/3-14 | 8 | 5 | Black | 1/4" | 3 | 150 | 47 | 210 |
| PUC8/5-14 | 8 | 5 | Black | 1/4" | 5 | 150 | 47 | 345 |

CHEMICAL RESISTANCE CHART

| N | PUR | PE | PVC | | N | PUR | PE | PVC | | N | PUR | PE | PVC | |
|---|-----|----|-----|------------------------|---|-----|----|-----|-------------------------------|---|-----|----|-----|---------------------------|
| - | - | - | - | Acetic Acid, Glacial | - | 4 | 1 | 4 | Ethylene Chloride | 3 | 2 | - | 4 | Picric Acid |
| 4 | 4 | 1 | 4 | Acetic acid, 30% | - | 4 | 1 | 4 | Ethylene Glycol | 4 | 4 | - | - | Potassium Acetate (aq) |
| 4 | 4 | 2 | 4 | Acetone | - | 4 | 4 | 2 | Ethylene Oxide | 4 | 1 | 1 | 1 | Potassium Chloride (aq) |
| 4 | 4 | 1 | 1 | Acetylene | - | 4 | 4 | 1 | Ethylene Trichloride | 4 | 1 | 1 | 1 | Potassium Cyanide (aq) |
| 4 | - | - | - | Akazene | - | 4 | 4 | - | Ferric Chloride (aq) | 3 | 4 | 1 | 1 | Potassium Hydroxide (aq) |
| 3 | 3 | 2 | 1 | Aluminum Chloride (aq) | - | 3 | 2 | 1 | Ferric Nitrate (aq) | 1 | 1 | 1 | 1 | Producer Gas |
| - | - | - | - | Aluminum Nitrate (aq) | - | 3 | - | - | Ferric Sulfate (aq) | 1 | 3 | 3 | 1 | Propane |
| 3 | 4 | 2 | 1 | Ammonia Anhydrous | - | 4 | 2 | 1 | Fluorine (Liqued) | 4 | 4 | - | - | Propyl Alcohol |
| 4 | 4 | - | - | Ammonia Gas (cold) | - | 3 | - | - | Formaldehyde (RT) | 4 | - | - | - | Propylene |
| 4 | 4 | - | - | Ammonia Gas (hot) | - | 4 | - | - | Formic Acid | 4 | - | - | - | Propylene Oxidce |
| 1 | 1 | 1 | 1 | Ammonium Chloride (aq) | - | 1 | 1 | 1 | Freon 11 | 4 | 4 | - | - | Pydraul, 10E, 29 ELT |
| 1 | 1 | 1 | 1 | Ammonium Sulfate (aq) | - | 1 | 1 | 1 | Freon 12 | 4 | - | - | - | Pydraul 30E, 50E, 65E |
| - | - | - | - | Amyl Alcohol | - | 4 | 2 | 1 | Freon 22 | 4 | 4 | - | - | Pydraul,115E |
| 4 | 4 | - | - | Amyl Naphthalene | - | 4 | 4 | - | Fuel Oil | 4 | - | - | - | Pydraul 230E, 312C, 540C |
| 1 | 1 | - | - | Animal Fats | - | 1 | - | - | Futural Glucose | 2 | 2 | - | - | Rapeseed Oil |
| 4 | 2 | 3 | 3 | Aqua Regia | - | 4 | 2 | 3 | Glue | 1 | 1 | - | - | Red Oil (MIL-H-5606) |
| 4 | 3 | 2 | 1 | Arsenic Acid | - | 3 | 2 | 1 | Glycerin | 1 | 1 | - | - | RJ-1 (MIL-F-2338 B) |
| 2 | 2 | 1 | 1 | Asphalt | - | 2 | 1 | 1 | Glycols | 1 | 1 | - | - | RP-1 (MIL-F-25576 C) |
| 2 | 3 | - | - | ASTM Fuel A | - | 2 | - | - | Green Sultate Liquor | 1 | 2 | 1 | 1 | Salt Water |
| 3 | 3 | 1 | 1 | ASTM Fuel B | - | 3 | - | - | Hexane | 4 | 4 | - | - | Sewage |
| 3 | 3 | 1 | 1 | ASTM Fuel C | - | 3 | 1 | 1 | Hydraulic Oil | 2 | 1 | - | - | Silicate Esters |
| 1 | 1 | 1 | 1 | Barium Chloride (aq) | - | 1 | 1 | 1 | Hydrochloric Acid (cold) 37% | 1 | 1 | 1 | 1 | Silicone Oils |
| 2 | 2 | 1 | 1 | Beer | - | 1 | 2 | 1 | Hydrochloric Acid (hot) 37% | 1 | 1 | 1 | 1 | Silver Nitrate |
| 4 | 4 | 1 | 1 | Beet Sugar Liquors | - | 4 | 1 | 1 | Hydrofluoric Acid (Conc.)Cold | 4 | 1 | 2 | 1 | Skydrol 500 |
| 1 | 3 | 3 | 3 | Benzene | - | 1 | 3 | 3 | Hydrofluoric Acid (Conc.) Hot | - | 4 | - | - | Skydrol 700 |
| 2 | 2 | - | - | Benzine | - | 2 | - | - | Hydrogen Gas | 1 | 3 | 3 | 1 | Soap Solutions |
| 4 | 4 | - | - | Blast Furnace Gas | - | 4 | - | - | Isobutyl Alcohol | 1 | 1 | 1 | 1 | Sodium Chloride (aq) |
| 4 | 4 | - | - | Bleach Solutions | - | 4 | - | - | Isocetane | 2 | 4 | 2 | 1 | Sodium Hydroxide (aq) |
| 1 | 1 | 2 | 2 | Borax | - | 1 | 1 | 2 | Isopropyl Acetate | 4 | 4 | 1 | 2 | Sodium Peroxide (aq) |
| 1 | 1 | 1 | 1 | Boric Acid | - | 1 | 1 | 1 | Isopropyl Alcohl | 1 | 1 | - | - | Sodium Phosphate (aq) |
| - | - | - | - | Brake Fluid | - | 4 | - | - | Isopropyl Ether | - | 1 | 1 | 1 | Sodium Sultate (aq) |
| 4 | 2 | 4 | 3 | Brine | - | 4 | 2 | 4 | Kerosene | - | 2 | 1 | 1 | Soy Bean Oil |
| 4 | 2 | - | - | Bromine Water | - | 4 | 4 | - | Lacquers | 4 | 4 | - | - | Steam Under 300°F |
| 1 | 1 | 3 | 3 | Bunker Oil | - | 1 | 1 | 3 | Lacquer Solvents | 4 | 4 | - | - | Steam Over 300°F |
| 1 | 1 | - | - | Butane | - | 1 | 1 | - | Lard | 4 | 1 | 3 | 3 | Stoddard Solvent |
| 1 | 1 | - | - | Butter | - | 1 | 1 | - | Lavender Oil | 3 | - | - | 4 | Styrene |
| 3 | 4 | 1 | 2 | Butyl Alcohol | - | 3 | 4 | 1 | Lead Acetate (aq) | - | 4 | - | - | Sucrose Solution |
| 4 | 4 | 1 | 1 | Butylene | - | 4 | 1 | 1 | Linseed Oil | 4 | 3 | 1 | 1 | Sulfuric Acid (Dilute) |
| 1 | 1 | 2 | 1 | Calcium Chloride (aq) | - | 1 | 1 | 2 | Liquidified Petrolateum Gos | 4 | 3 | 4 | - | Sulfuric Acid (Conc.) |
| 1 | 1 | 2 | 1 | Calcium Hydroxide (aq) | - | 1 | 1 | 2 | Lubricating Oils | 4 | 3 | 2 | 1 | Sulfuric Acid (20% Oleum) |
| 1 | 1 | - | - | Calcium Nitrate (aq) | - | 1 | 1 | - | Lye | 4 | 3 | 2 | 1 | Sulfurous Acid |
| 1 | 1 | - | - | Calcium Sulfide (aq) | - | 1 | 1 | - | Magnesium Chloride (aq) | 1 | 2 | 1 | - | Tannic Acid |
| - | - | - | - | Cane Sugar Liquors | - | 4 | - | - | Magnesium Hydroxide (aq) | - | 4 | 2 | 4 | Tetrochloroethylene |
| 3 | 3 | 2 | 3 | Carbolic Acid | - | 3 | 2 | 3 | Mercury | 1 | 4 | 3 | 4 | Toluene |
| 1 | 1 | 3 | 1 | Carbon Dioxide | - | 1 | 3 | 1 | Methane | - | 1 | - | - | Transformer Oil |
| 1 | 1 | 2 | 1 | Carbonic Acid | - | 1 | 2 | 1 | Methyl Acetate | - | 1 | - | - | Transmission Fluid Type A |
| 1 | 2 | 1 | 2 | Carbon Monoxide | - | 1 | 2 | 1 | Methyl Acrylate | 3 | 4 | - | 3 | Trichloroethane |
| 3 | 4 | 2 | 2 | Carbon Tetrachloride | - | 3 | 4 | 2 | Methyl Alcohol | 3 | 4 | 3 | 4 | Trichoroethylene |
| - | - | - | - | Castor Oil | - | 1 | - | - | Methyl Butyl Ketone | - | 1 | 3 | - | Turbine Oil |
| 4 | 4 | 2 | 1 | Chlorine (dry) | - | 4 | 4 | 2 | Methyl Chloride | 1 | 4 | 3 | 2 | Turpentine |
| 4 | 4 | 1 | 1 | Chlorine (wet) | - | 4 | 4 | - | Methylene Chloride | 1 | 3 | 3 | 4 | Varnish |
| 3 | 4 | 3 | 4 | Chloroform | - | 3 | 4 | 3 | Methyl Ethyl Ketone | 1 | 4 | 2 | 1 | Vinegar |
| 4 | 4 | 3 | 4 | Chlorox | - | 4 | 4 | - | Methyl Isobuti Ktone | 1 | 4 | - | - | Vinyl Chloride |
| 4 | 4 | 1 | 1 | Chromic Acid | - | 4 | 4 | 1 | Milk | 1 | 1 | 1 | 1 | Water |
| 1 | 1 | 1 | 2 | Citric Acid | - | 1 | 1 | 1 | Mineral Oil | 1 | 2 | 3 | 1 | Whiskey |
| 1 | 3 | - | - | Coal Tar | - | 1 | 3 | - | Naphtha | - | 1 | - | - | White Oil |
| 2 | 2 | - | - | Coconut Oil | - | 2 | - | - | Naphthalene | - | 3 | - | - | Wood Oil |
| 1 | 1 | - | - | Cod Liver Oil | - | 1 | - | - | Natural Gas | - | 4 | 3 | 4 | Xylene |
| 4 | 4 | - | - | Coke Oven Gas | - | 4 | - | - | Neatsfoot Oil | 2 | 4 | 3 | 4 | Zinc Acetate (aq) |
| 1 | 1 | 2 | 1 | Copper Chloride (aq) | - | 1 | 2 | 1 | Nitric Acid (Conc.) | 1 | 4 | 1 | - | Zinc Chloride (aq) |
| - | - | - | - | Copper Chloride (aq) | - | 1 | 2 | 1 | Nitric Acid (Dilute) | 1 | 1 | - | 1 | |
| 1 | 1 | 3 | 2 | Com Oil | - | 1 | 3 | 2 | Nitroethane | - | - | - | - | |
| 1 | 1 | 2 | 2 | Cotton Seed Oil | - | 1 | 2 | 2 | Nitrogen | - | - | - | - | |
| 4 | 4 | 3 | 4 | Creosot | - | 4 | 4 | 3 | N-Octane | - | - | - | - | |
| 1 | 1 | 2 | 4 | Cychlohexane | - | 1 | 1 | 2 | Oleic Acid | - | - | - | - | |
| 4 | 4 | - | - | Denatured Aicohol | - | 1 | 4 | - | Oleum Spirits | - | - | - | - | |
| - | - | - | - | Detergent Solution | - | 4 | 1 | 1 | Olive Oil | - | - | - | - | |
| 3 | 3 | 1 | 1 | Diesel Oil | - | 3 | 3 | 1 | Oxygen-Cold | - | - | - | - | |
| 4 | 4 | - | - | Dioxane | - | 4 | - | - | Oxygen (200-400°F) | - | - | - | - | |
| 3 | 3 | - | - | Dowtherm Oil | - | 3 | - | - | Paint Thnner, Duco | - | - | - | - | |
| 4 | 4 | - | - | Dry Cleaning Fluids | - | 4 | - | - | Perchloric Acid | - | - | - | - | |
| 3 | 3 | - | 4 | Ethane | - | 3 | - | 4 | Perchloroethylene | - | - | - | - | |
| - | - | - | - | Ethyl Acrylate | - | 4 | - | - | Petrolenm-Below 250°F | - | - | - | - | |
| 4 | 4 | - | - | Ethyl Alcohol | - | 3 | 4 | - | Petroleum-Above 250 F | - | - | - | - | |
| 4 | 4 | - | - | Ethyl Benzine | - | 4 | 4 | - | Phenol | - | - | - | - | |
| 2 | 2 | - | - | Ehtyl Cellulose | - | 2 | - | - | Phenyl Ethyl Ether | - | - | - | - | |
| 2 | 2 | - | - | Ethyl Chloronde | - | 2 | - | - | Phosphoric Acid-45% | - | - | - | - | |
| 3 | 3 | - | - | Ethyl Ether | - | 3 | - | - | Pickling Solution | - | - | - | - | |

NYLON 6, 12 & POLYURETHANE ETHER BASE/PE POLYETHYLENE/PVC POLYVINYL CHLORIDE

Please Note: The above ratings are very general guidelines and designed only to be used as an initial screening tool.

Careful testing under actual conditions essential. Accuracy for these ratings is not given or implied.

Ratings: 1. Little or no impact/
2. Minor effect/ 3. Moderate effect/
4. Severe effect.