


Oil & Suction Delivery Hose

RoHS 3
COMPLIANT ✓ **ISO 1307**

Working Temperature:
-40°C to +90°C
(+100°C when used with oil)

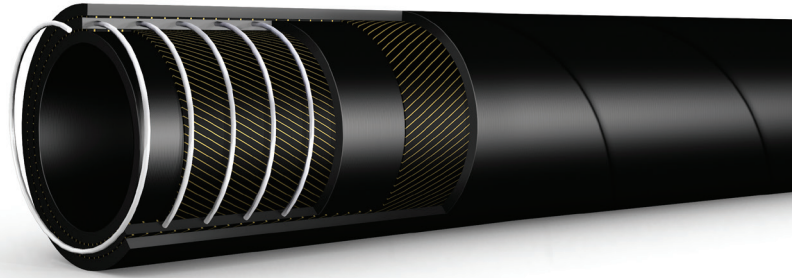

TEXAS 10 - OIL SUCTION DELIVERY W.P. 10 BAR

Tube: Oil and petrol resistant, conductive synthetic Nitrile black rubber

Reinforcement: High tensile synthetic textile, steel wire helix and anti-static copper wire

Cover: Oil, weather, o-zone, abrasion and sea weather resistant, special synthetic rubber

Application: Suction & delivery for filling and discharging tanks, petrol tankers and ships with unleaded fuels (EN228:2017) with an aromatic content of components 50% max.

Part Number	Size	ID mm	OD mm	Working Pressure		Burst Pressure		Vacuum Pressure	Bend Radius mm	Weight gr/m
				Bar	PSI	Bar	PSI	Bar		
100R4-19	3/4	19	30	10	145	30	450	-0.92	90	600
100R4-25	1	25.4	35	10	145	30	450	-0.92	110	650
100R4-32	1.1/4	32	42	10	145	30	450	-0.92	140	835
100R4-38	1.1/2	38	48	10	145	30	450	-0.92	170	1050
100R4-51	2	50.8	61	10	145	30	450	-0.92	250	1495
100R4-64	2.1/2	63.5	74	10	145	30	450	-0.92	310	2010
100R4-76	3	76.2	87	10	145	30	450	-0.92	380	2337
100R4-89	3.1/2	90	102	10	145	30	450	-0.92	450	2940
100R4-102	4	101.6	115	10	145	30	450	-0.92	510	3440
100R4-127	5	127	145	10	145	30	450	-0.92	650	6195
100R4-152	6	152	170	10	145	30	450	-0.92	752	7050

Branding: TEXAS 10 - OIL SUCTION DELIVERY W.P. 10 BAR

Reinforcement: Black