
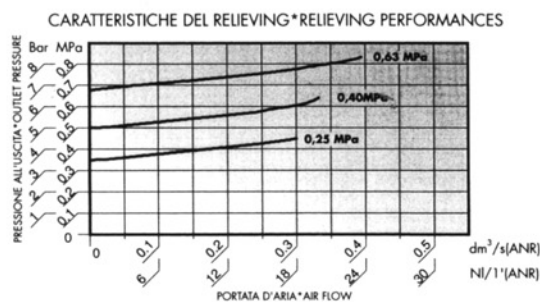
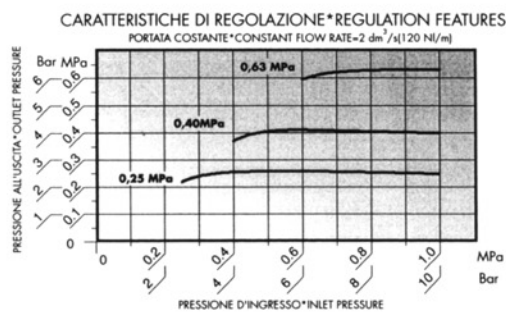


MICROREGOLATORE MODULARE

- * Funzionamento a membrana.
- * Estrema facilità d'assemblaggio, grazie al particolare sistema d'aggancio.
- * Utilizzabile nelle versioni per aria (con relieving e pomello rosso) e per acqua (senza relieving e pomello nero).
- * Possibilità di fissaggio a parete utilizzando i fori predisposti.
- * Campo di regolazione: 0-6 Bar (0-0,6 MPa).
- * Pressione massima d'ingresso: 12,5 Bar (1,25 MPa).
- * Range di temperatura 5-50°C (41-122°F).
- * Coppia di serraggio max. inserti G1/8" IN-OUT: 20 N-m.
- * Peso 0,080 Kg.

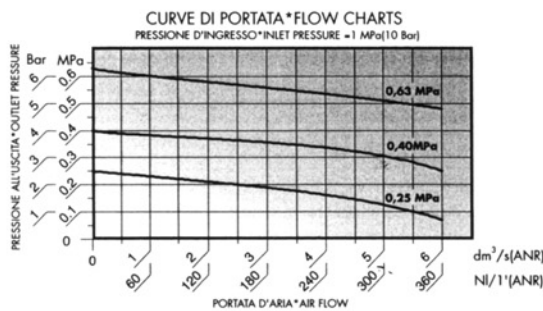

MODULAR MICROREGULATOR

- * Operation with diaphragm.
- * Extremely easy to assemble thanks to the special coupling system
- * Can be used in air (with relieving and red knob) and water (without relieving and with black knob).
- * Can be wall mounted using the relative holes.
- * Pressure locking device.
- * Pressure regulation range 0-6 Bar (0-0,6 MPa).
- * Maximum inlet pressure: 12,5 Bar (1,25 MPa).
- * Temperature range 5-50°C (41-122°F).
- * Max. torque inserts G1/8" IN-OUT: 20 N-m.
- * Weight 0,080 Kg.